



at&t

AT&T Managed Internet Services

CON [REDACTED] SERVICES

**VoMIS – IP PBX
IP Local – IP Flexible Reach
Site Documentation Package
2811 – Internal DSU/CSU**

Case#: IP10070249

SDD: 11/24/2010

Technical Contact Name: Ca [REDACTED] ip

Site Address: [REDACTED] INDUSTRIAL DR

TELCO, 1

Site Suite & Building:

Site City & State: [REDACTED] MO [REDACTED]

Contact Phone: (4 [REDACTED] 9303

Call Between Hours of 8 am - 5 pm Eastern to Schedule a
Test & Turn-up. Please allow 48 hours for scheduling:

IM/PTE/SIM: Ve [REDACTED] al

Phone #: 888- [REDACTED] 0, prompts, 4, 1

CPE Ship To Location & Contact:

	Industrial Dr
	, MO (
Ca	ip (4 -9303

System Engineer: D [REDACTED] field

Telephone #: 8 [REDACTED] 8

TABLE OF CONTENTS

<u>SHEET NO.</u>	<u>DESCRIPTION</u>	<u>REVISION</u>
1	TABLE OF CONTENTS	2.0
2	EQUIPMENT ORDER LIST (EOL)	2.0
3	ROUTER CABLING AND ADDRESSING DIAGRAM	2.0
4	REAR LAYOUT OF 2811 ROUTER	2.0

EQUIPMENT ORDER LIST (EOL)

<u>Manufacturer</u>	<u>Qty</u>	<u>Mfr. P/N (INFO HW Code)</u>	<u>Description</u>
Cisco	1	CISCO2811-V/K9	2811 Voice Bundle,PVDM2-16,SP Serv,64F/256D
Cisco	1	HWIC-1DSU-T1 (XDCHSUT1)	Updated 1-Port T1/Fractional T1 DSU/CSU WAN Interface Card
Cisco	1	CAB-AC	AC Power Cord,110V
Cisco	1	S28NSPSK9-12415T	Cisco 2800 IOS SP SERVICES 12.4(15)T13a (c2800nm-spservicesk9-mz.124-15.T13a.bin)
Cisco	1	PWR-2811-AC	Cisco 2811 A/C AC Power supply
Cisco	1	ROUTER-SDM	Device manager for routers
Cisco	1	MEM2800-256D-INC	256MB DDR DRAM Memory factory default for the Cisco 2800
Cisco	1	MEM2800-64CF-INC	64MB CF default for Cisco 2800 Series
Cisco	1	PVDM2-16	16-Channel Packet Voice/Fax DSP Module
			IP PBX
			Select optional switch interface card <None selected>
<u>DCE/Cables</u>			
Custom Cable	1	SPF411A (ISE994)	6-Outlet with RJ-11 Telephone Protection (360 Joules)
Custom Cable	1	56841-025-262 (ISE642-025)	RJ48 Cable (56/FT1/T1 DSU to Net. Interface - 25 ft.)
US Robotics	1	3GP3453 (XDU33453)	U.S. Robotics V.Everything 56K Analog Corporate Modem
Custom Cable	1	48085-000-885 (ISE1138-000)	T1 loopback plug Male RJ45
CTDI	1	1475 (ISE1475)	RJ45 Coupler F-F Straight (Holder for ISE1138)

ROUTER CABLING AND ADDRESSING DIAGRAM


IP ADDRESS CONFIGURATION INFORMATION:

Serial0/0/0 IP Address: 12.2.2.6 Mask: 255.255.255.252

FastEthernet0/0 IP Address: 12.2.2.97 Mask: 255.255.255.248
LAN IP Range: 12.205.8.96 - 12.2.2.103

FastEthernet0/1 IP Address: Not Used Mask: Not Used
LAN IP Range: Not Used


COS PROFILE: 101 (90% RT, 0/0/100 Data)

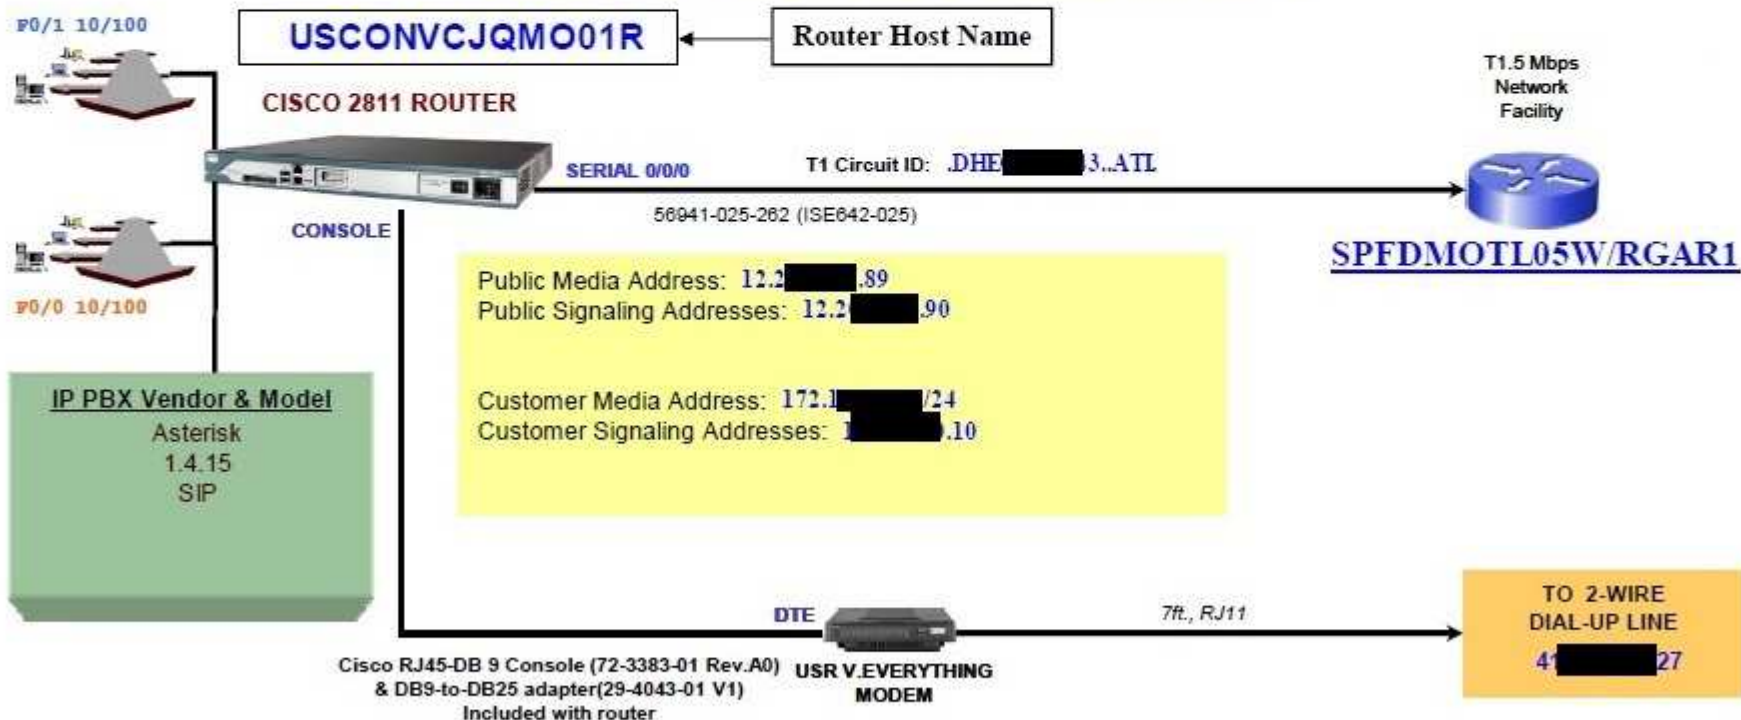

Maintenance Option: Plus / M4

LAYOUT OF 2811 ROUTER

Rear
View

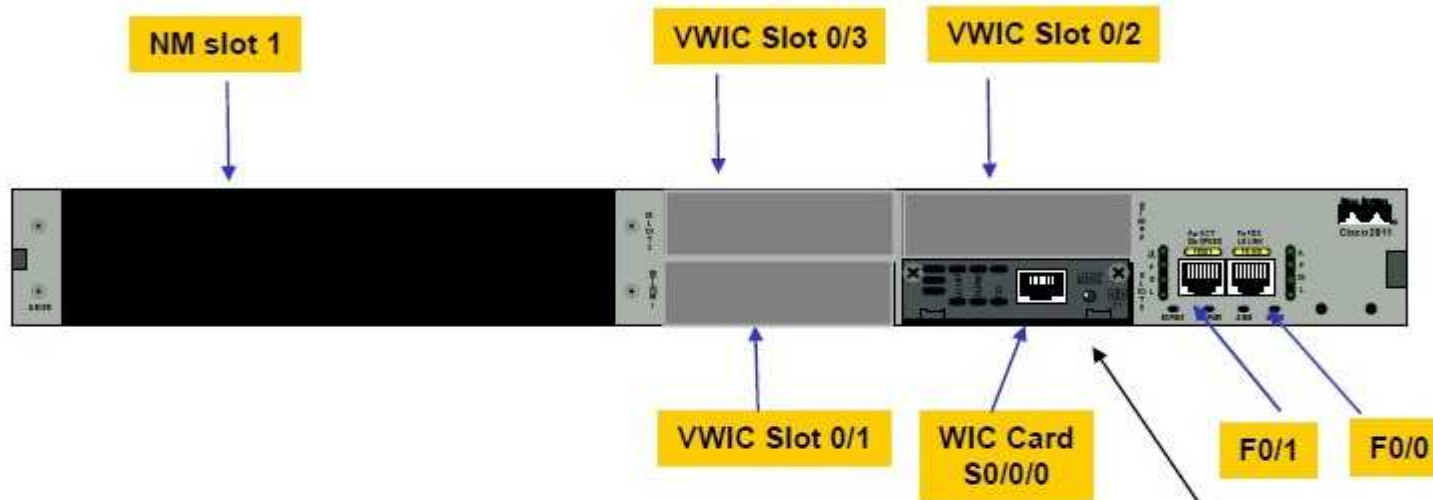

Only serial card is required

Front
View

